


O ringe / O Rings

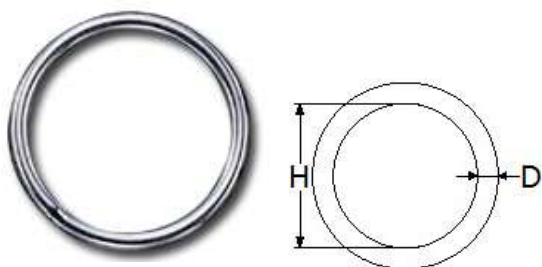

Rustfri stål AISI 316

Stainless steel AISI 316

| Art No. | D mm | H mm | Weight Kg |
|----------|------|------|-----------|
| A4820325 | 3 | 25 | 0,49 |
| A4820425 | 4 | 25 | 0,55 |
| A4820430 | 4 | 30 | 1,07 |
| A4820525 | 5 | 25 | 1,45 |
| A4820530 | 5 | 30 | 1,93 |
| A4820545 | 5 | 45 | 2,42 |
| A4820550 | 5 | 50 | 2,66 |
| A4820630 | 6 | 30 | 2,80 |
| A4820635 | 6 | 35 | 2,90 |
| A4820650 | 6 | 50 | 3,70 |
| A4820840 | 8 | 40 | 6,10 |
| A4820845 | 8 | 45 | 6,20 |
| A4821060 | 10 | 60 | 13,50 |
| A4821090 | 10 | 90 | 19,30 |
| A4821290 | 12 | 90 | 28,40 |

D ringe / D Rings




Rustfri stål
AISI 316

Stainless steel
AISI 316

| Art No. | D mm | H mm | B mm | Weight Kg |
|----------|------|------|------|-----------|
| A4830425 | 4 | 25 | 22 | 0,90 |
| A4830435 | 4 | 35 | 32 | 1,20 |
| A4830535 | 5 | 35 | 32 | 1,95 |
| A4830545 | 5 | 45 | 43 | 2,90 |
| A4830655 | 6 | 55 | 52 | 4,60 |

Losse svirvel øje-øje / Regular Swivel Eye-Eye

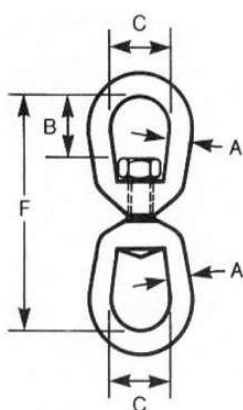

Galvaniseret

Type G-402 Øje/Øje

Sikkerhedsfaktor 5:1

Højstyrke stål, sejhærdet

Materiale i henhold til Fed. Spec. RR-C-271D type VII, Class 1

Galvanized

Type G-402 Eye/Eye

Safetyfactor 5:1

High tensile steel, quenched and tempered

Material in relation to Fed. Spec. RR-C-271D type VII, Class 1

| Art No. | WLL tons | A mm | F mm | B mm | C mm | Weight Kg |
|---------|----------|------|-------|------|------|-----------|
| LSØ06 | 0,39 | 6 | 67,0 | 17 | 19 | 0,11 |
| LSØ08 | 0,57 | 8 | 74,5 | 21 | 25 | 0,17 |
| LSØ10 | 1,02 | 10 | 92,0 | 24 | 32 | 0,32 |
| LSØ13 | 1,63 | 13 | 114,0 | 33 | 38 | 0,65 |
| LSØ16 | 2,36 | 16 | 135,0 | 40 | 44 | 1,12 |
| LSØ19 | 3,27 | 19 | 154,0 | 44 | 51 | 1,76 |
| LSØ22 | 4,54 | 22 | 178,0 | 52 | 57 | 2,61 |
| LSØ25 | 5,67 | 25 | 217,0 | 59 | 64 | 4,65 |
| LSØ32 | 8,16 | 32 | 248,0 | 68 | 80 | 7,14 |
| LSØ38 | 20,50 | 38 | 374,0 | 106 | 102 | 24,8 |