


Løfteklo / Lifting Clamp

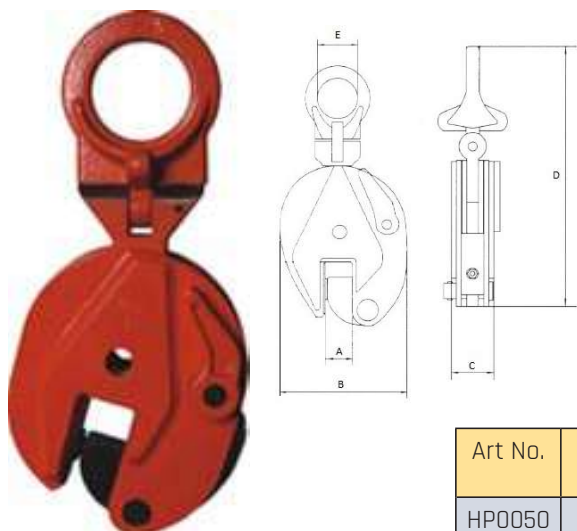

Med kardanled
Løfteklo med universal løfteøje for løft i alle retninger
Med sikkerhedslås

With universal joints
Lifting clamp with universal lifting eye for lift in all directions
With safety lock

Art No.	WLL tons	Jaw opening mm	A mm	B mm	C mm	D mm	E mm	Weight Kg
HP0050	0,5	0-15	15	103	36	218	30	2,0
HP0100	1,0	0-20	20	138	50	305	48	5,0
HP0200	2,0	0-25	25	164	52	368	68	7,5
HP0300	3,0	0-30	30	180	87	340	40	7,5
HP0500	5,0	0-52	52	225	87	450	60	14,5

Løfteklo alm. / Lifting Clamp




Løfteklo med løfteøje for løft
Med sikkerhedslås

Lifting clamp with lifting eye for lifting
With safety lock

Art No.	WLL tons	Jaw opening mm	Weight Kg
VP0100	1,0	0-22	3,8
VP0200	2,0	0-30	5,6
VP0300	3,0	0-35	8,8
VP0500	5,0	0-50	15,5

Løfteklo / Plate Lifting Clamp



Anvendes til vandret transport
Skal altid anvendes parvis
Ved brug af mere end 2 kløer skal der anvendes løfteåg

Used for horizontal transport
Must be used in pairs
Lifting beam is required if using more than 2 clamps

Art No.	WLL kg	Jaw opening mm	A mm	B mm	C mm	D mm	E mm	Weight Kg
LKLO075	750	0-25	25	125	50	175	25	3,5
LKLO150	1500	0-30	30	161	65	205	30	4,3
LKLO200	2000	0-35	35	201	83	245	35	7,5