


Snap krog, galvaniseret / Snap Hook, Galvanized




Type G-3315
Sikkerhedsfaktor: 4:1

Type G-3315
Safety factor: 4:1

Art No.	WLL tons	Hook size	A mm	B mm	C mm	D mm	E mm	F mm	H mm	Weight Kg
80331511	0,340	7/16	6,35	19,1	100	82,5	11,2	57,0	19,1	0,11
80331514	0,450	9/16	8,55	28,4	120	97,5	14,2	68,5	20,6	0,22

Ringkobling for Frimeda / Lifting Eye for Frimeda


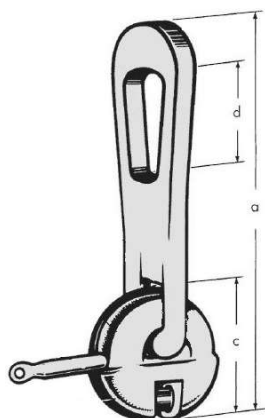


For løft og transport af beton elementer med originale indstøbningsankre
Galvaniseret

For lifting and transport of concrete elements with original embedment ties
Galvanized

Art No.	WLL tons	A mm	C mm	D mm	E mm	Weight Kg
FR013	1,25	170	50	50	11	0,7
FR025	2,50	265	70	50	12	1,5
FR050	5,00	330	86	71	16	3,4
FR100	10,00	425	112	90	25	8,7
FR260	26,00	605	160	120	30	25,0

Ringkobling for Deha / Lifting Eye for Deha

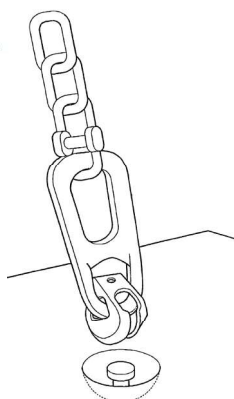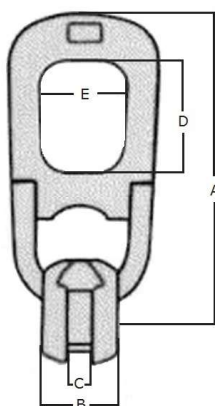

For løft og transport af beton elementer med originale indstøbningsankre
Galvaniseret

For lifting and transport of concrete elements with original embedment ties
Galvanized

Art No.	WLL tons	A mm	C mm	D mm	E mm	Weight Kg
2039013D	0-1,3	188	11	71	47	0,9
2039025D	1,5-2,5	230	16	86	59	1,4
2039050D	3,0-5,0	283	21	88	70	3,4
2039010D	6,0-10,0	401	30	115	88	9,1
2039020D	12,0-20,0	506	41	135	106	-

For all products: Weight, size and color may vary